

by PHE


Slit-Cut Creaser

331BSC Gemini Cut Air

Feature

- -9 inch touch screen display and control
- -Programmable slit, cut, crease in one pass
- -Top vacuum feeding with Central registion
- -Ultrasonic double feed detector
- -New Slide-in type crease/perforate dies
- -Adjust slitter position precisely by gauge
- -Slitters overall movement knob
- -Mark reader for image drift
- -Compact design

Specification

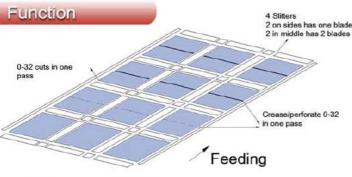



Touch screen

Feeding type: Top suction feeding 210*210mm-330*670mm

Outfeed size: 45*50mm-330*670 Paper weight: 110-350gsm

Paper type: Chrome, laminated, UV coated etc.

Loading capacity: 50mm

Speed: 20pcs/min

Register mark: Feeding direction

Double feed detection: By Ultrasonic

Crease width: 1.0mm

Crease/Perf in one pass: Up to 32 times in one pass

Slitting: 4 slitters, fixed with gauge

2 side trimmer

2 gutter slitter with fixed 8mm (3/8 inch) gap.

Cutting: Up to 32 times in one pass

Accuracy: +/-0.2mm

Image shrink and stretch: Feeding direction

Gutter slit: 8mm(3/8 inch)
Gutter cut: 0 or 3-15mm

Optional tools: Customized Gauge, Cross Perforator (12TPI)

Outfeed Conveyor

Power: Either 220V Or 110V ,50Hz/60Hz



Slide-in tools



Top feeding



Slitter,cutter and gauge



Auto Stacker(Option)

Application



